

PRELIMINARY DATA SHEET

SMV2025 Hyperabrupt Tuning Varactors Supplied on Film Frame and Waffle Packs

Applications

- Wide-bandwidth and low phase-noise VCOs
- Wide-range, voltage-tuned phase shifters and filters
- Miniature RF and microwave tuners

Features

- Low series resistance and leakage current for low phase-noise VCOs
- High-capacitance ratio: $C_T(2\text{ V})/C_T(10\text{ V}) = 2.2$ minimum
- Broad 18 V tuning range
- Competitive cross to Toshiba 1SV280 varactor diode in die form
- Available as:
 - Full wafer on film frame (SMV2025-099)
 - Dice in waffle packs (SMV2025-000)
- Small footprint chip size: 10.5 x 10.5 x 5.5 mils
- For RoHS and other product compliance information, see the [Skyworks Certificate of Conformance](#).



Description

The SMV2025 series are silicon surface mount, hyperabrupt tuning varactor diodes, excellent for use as high-Q tuning elements in an RF Voltage Controlled Oscillator (VCO), voltage-controlled phase shifter, or tunable bandpass filter.

The minimum capacitance ratio from 2 V to 10 V is 2.2, which makes the SMV2025 series suitable for wide-bandwidth VCOs and wide phase-range phase shifters.

The SMV2025-099 is supplied as 100-percent electrically tested, fully singulated wafers mounted on a film frame. The SMV2025-000 is supplied as a 100-percent electrically tested die in waffle packs.

The absolute maximum ratings of the SMV2025 varactors are provided in Table 1. Electrical specifications are provided in Table 2. Typical performance characteristics are shown in Figure 1 and Figure 2. Typical capacitance values for reverse voltages between 0 and 20 V are summarized in Table 3. The SPICE model for the SMV2025 die is shown in Figure 3, and the associated model parameters are provided in Table 4. Die mechanical characteristics are listed in Table 5.

Table 1. SMV2025-000/-099 Absolute Maximum Ratings

Parameter	Symbol	Minimum	Maximum	Units
Power dissipation at cathode temperature of 25 °C	P _{DIS}		250	mW
Reverse voltage	V _R		20	V
Forward current	I _F		100	mA
Junction temperature	T _J	–55	+150	°C
Storage temperature	T _{STG}	–55	+150	°C
Electrostatic Discharge:	ESD			
Charged Device Model (CDM), Class 4			1000	V
Human Body Model (HBM), Class 3A			4000	V
Machine Model (MM), Class C			400	V

Note: Exposure to maximum rating conditions for extended periods may reduce device reliability. There is no damage to device with only one parameter set at the limit and all other parameters set at or below their nominal value. Exceeding any of the limits listed here may result in permanent damage to the device.

CAUTION: Although this device is designed to be as robust as possible, Electrostatic Discharge (ESD) can damage this device. This device must be protected at all times from ESD. Static charges may easily produce potentials of several kilovolts on the human body or equipment, which can discharge without detection. Industry-standard ESD precautions should be used at all times.

Table 2. SMV2025-000/-099 Electrical Specifications (Note 1) (Note 2)
(Cathode Temperature = 25 °C, Unless Otherwise Noted)

Parameter	Symbol	Test Condition	Min	Typical	Max	Units
Reverse breakdown voltage	V _{BR}	I _R = 10 μA	20			V
Reverse leakage current	I _R	V _R = 19 V			20	nA
Junction capacitance	C _{J2}	V _R = 2 V, f = 1 MHz	4.12		5.03	pF
	C _{J10}	V _R = 10 V, f = 1 MHz	1.52		1.93	pF
	C _{J18}	V _R = 18 V, f = 1 MHz	0.98		1.18	pF
Capacitance ratio	C _{J2} /C _{J10}		2.27	2.6		–
Series resistance	R _S	V _R = 1 V, f = 470 MHz		0.5	0.8	Ω

Note 1: Performance is guaranteed only under the conditions listed in this Table and is not guaranteed over the full operating or storage temperature ranges. Operation at elevated temperatures may reduce reliability of the device.

Note 2: The SMV2025-000 and SMV2025-099 are 100% tested for junction capacitance, capacitance ratio, reverse leakage current, and breakdown voltage. Electrical rejects of the SMV2025-099 devices (singulated wafer on film frame) are identified with black ink.

Typical Performance Characteristics

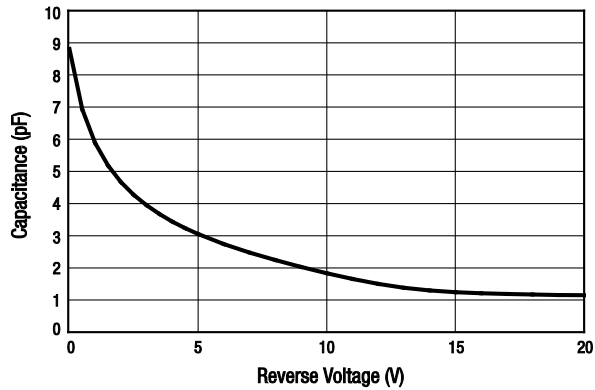


Figure 1. Capacitance vs Reverse Voltage

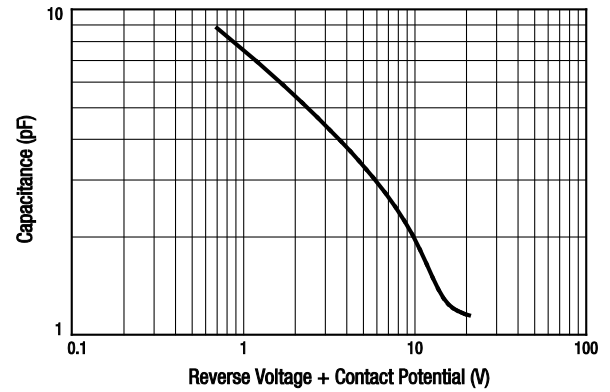


Figure 2. Capacitance vs Reverse Voltage (Logarithmic Plot)

Table 3. Reverse Voltage vs Typical Capacitance

V _R (V)	C _T (pF)	V _R (V)	C _T (pF)
0	8.81	8.0	2.24
0.5	6.93	9.0	2.03
1.0	5.88	10.0	1.83
1.5	5.18	11.0	1.65
2.0	4.67	12.0	1.50
2.5	4.27	13.0	1.38
3.0	3.94	14.0	1.30
3.5	3.67	15.0	1.24
4.0	3.44	16.0	1.21
4.5	3.23	17.0	1.19
5.0	3.05	18.0	1.17
6.0	2.74	19.0	1.16
7.0	2.47	20.0	1.15

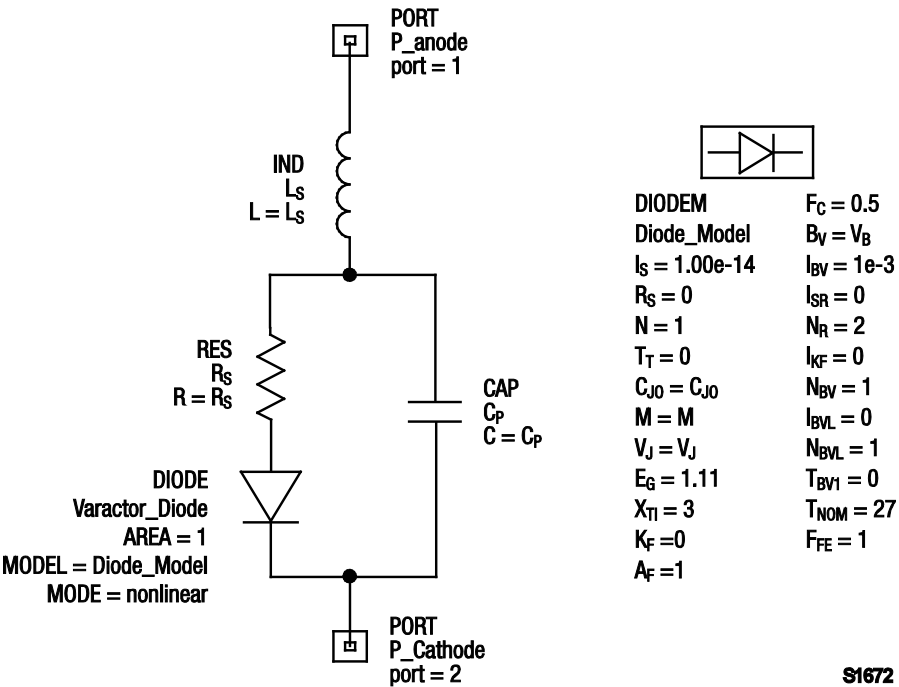


Figure 3. SPICE Model

Table 4. SPICE Model Parameters

Part Number	C _{JO} (pF)	V _J (V)	M	C _P (pF)	R _S (Ω)	L _S (nH)
SMV2025-000	8.8	1.05	0.7	0.07	0.8	0.15
SMV2025-099	8.8	1.05	0.7	0.07	0.8	0.15

Table 5. SMV2025 Die Characteristics


Part Number	Quantity of Good Dice Per Wafer	Chip Size		Chip Thickness		Typical Anode Contact Diameter	
		(in)	(mm)	(in)	(mm)	(in)	(mm)
SMV2025-000	N/A	0.0105 x 0.0105 ± 0.002	0.2667 x 0.2667 ± 0.050	0.005 ± 0.001	0.127 ± 0.0254	0.0035	0.0889
SMV2025-099	55,000 minimum 60,000 nominal	0.0105 x 0.0105 ± 0.002	0.2667 x 0.2667 ± 0.050	0.005 ± 0.001	0.127 ± 0.0254	0.0035	0.0889

Package Outline Drawings


Table 5 identifies the die part numbers with their corresponding quantity per wafer and chip measurements. The package outline die drawing for the SMV2025-000 (dice in waffle packs) is shown

in Figure 4. The package outline die drawing for the SMV2025-099 (full wafer on film frame) is shown in Figure 5.

The SMV2025-000 is supplied in quantities of 100 pieces per waffle pack.

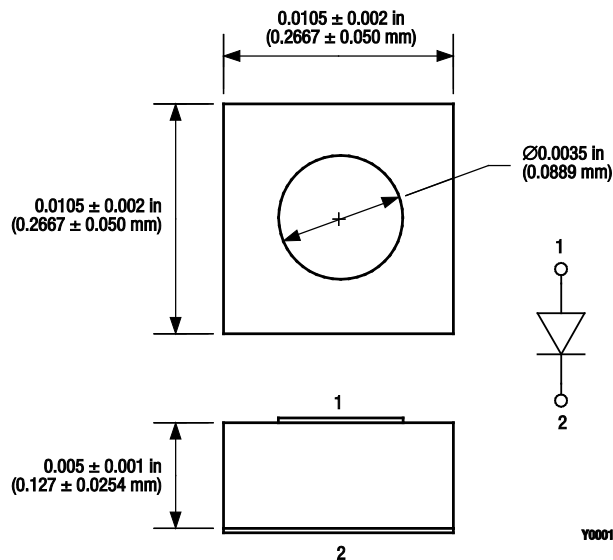

**Figure 4. SMV2025-000 Die Outline Drawing
(Dice in Waffle Packs)**

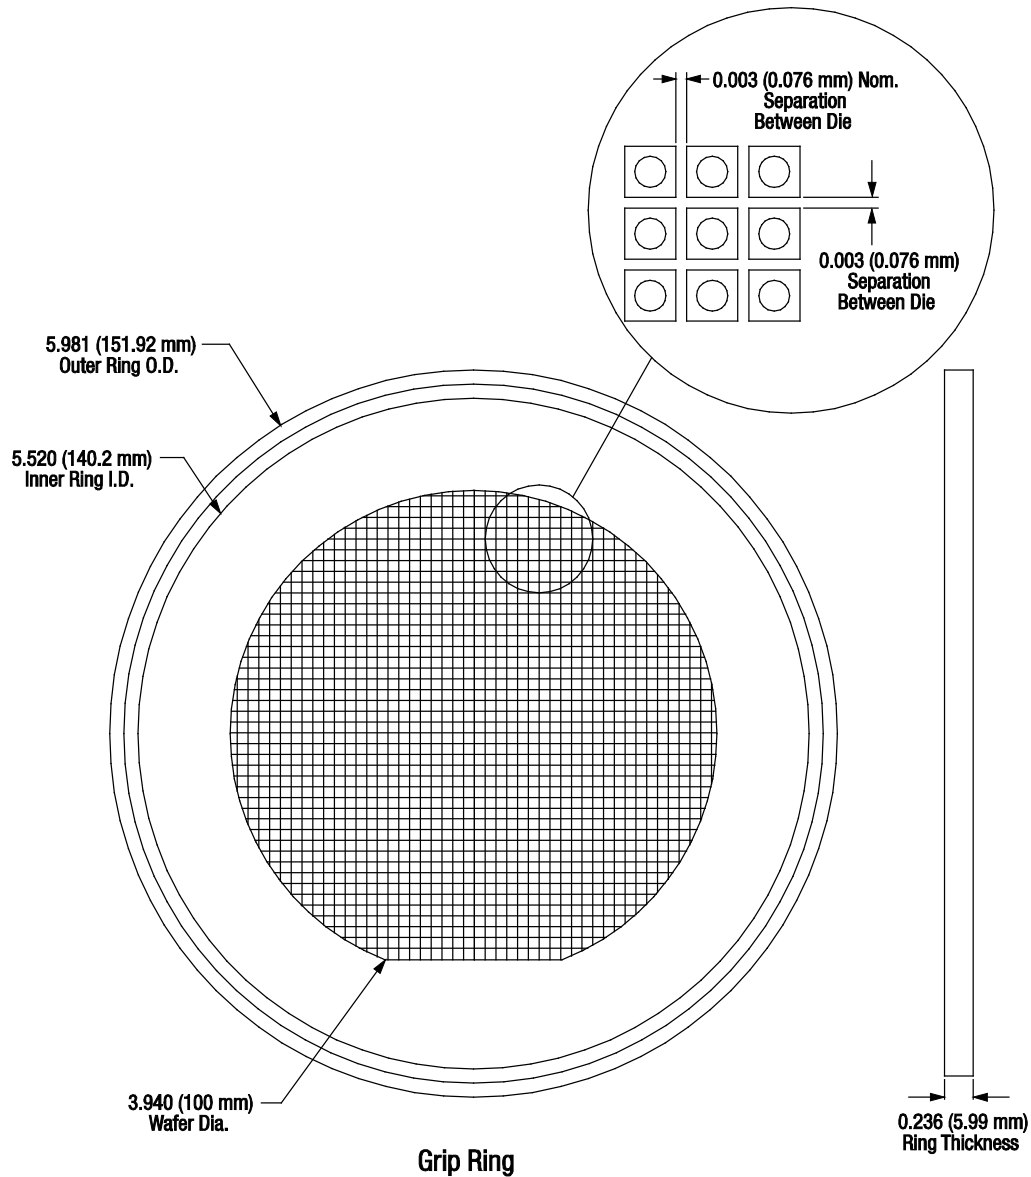

Wafer Film Frame Description
 Wafer on nitto tape
 Color: light blue
 Thickness: 2.2±3 mils
 Tensile strength: 6.6 (lbs. in width)
 Ring material: plastic

S1611

**Figure 5. SMV2025-099 Die Outline Drawing
 (Full Wafer on Film Frame)**

Ordering Information

Model Name	Manufacturing Part Number
SMV2025-000 (dice, 100 per wafer pack)	SMV2025-000
SMV2025-099 (singulated wafer on film frame)	SMV2025-099

Copyright © 2013, 2026 Skyworks Solutions, Inc. All Rights Reserved.

Information in this document is provided in connection with Skyworks Solutions, Inc., and its subsidiaries ("Skyworks") products or services. These materials, including the information contained herein, are provided by Skyworks as a service to its customers and may be used for informational purposes only by the customer. Skyworks assumes no responsibility for errors or omissions in these materials or the information contained herein. Skyworks may change its documentation, products, services, specifications or product descriptions at any time, without notice. Skyworks makes no commitment to update the materials or information and shall have no responsibility whatsoever for conflicts, incompatibilities, or other difficulties arising from any future changes.

No license, whether express, implied, by estoppel or otherwise, is granted to any intellectual property rights by this document. Skyworks assumes no liability for any materials, products or information provided hereunder, including the sale, distribution, reproduction or use of Skyworks products, information or materials, except as may be provided in Skyworks' Terms and Conditions of Sale.

THE INFORMATION IN THIS DOCUMENT AND THE MATERIALS AND PRODUCTS DESCRIBED THEREIN ARE PROVIDED "AS IS" WITHOUT WARRANTY OF ANY KIND, WHETHER EXPRESS, IMPLIED, STATUTORY, OR OTHERWISE, INCLUDING FITNESS FOR A PARTICULAR PURPOSE OR USE, MERCHANTABILITY, PERFORMANCE, QUALITY OR NON-INFRINGEMENT OF ANY INTELLECTUAL PROPERTY RIGHT; ALL SUCH WARRANTIES ARE HEREBY EXPRESSLY DISCLAIMED. SKYWORKS DOES NOT WARRANT THE ACCURACY OR COMPLETENESS OF THE INFORMATION, TEXT, GRAPHICS OR OTHER ITEMS CONTAINED WITHIN THESE MATERIALS. SKYWORKS SHALL NOT BE LIABLE FOR ANY DAMAGES, INCLUDING BUT NOT LIMITED TO ANY SPECIAL, INDIRECT, INCIDENTAL, STATUTORY, OR CONSEQUENTIAL DAMAGES, INCLUDING WITHOUT LIMITATION, LOST REVENUES OR LOST PROFITS THAT MAY RESULT FROM THE USE OF THE MATERIALS OR INFORMATION, WHETHER OR NOT THE RECIPIENT OF MATERIALS HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

Skyworks products are not designed, intended, authorized, or warranted for use or inclusion in life support or life endangering applications, devices, or systems where failure or inaccuracy might cause death or personal injury. Skyworks customers agree not to use or sell the Skyworks products for such applications, and further agree to, without limitation, fully defend, indemnify, and hold harmless Skyworks and its agents from and against any and all actions, suits, proceedings, costs, expenses, damages, and liabilities including attorneys' fees arising out of or in connection with such improper use or sale.

Skyworks assumes no liability for applications assistance, customer product design, or damage to any equipment resulting from the use of Skyworks products outside of Skyworks' published specifications or parameters. Customers are solely responsible for their products and applications using the Skyworks products.

"Skyworks" and the Skyworks Starburst logo are registered trademarks of Skyworks Solutions, Inc., in the United States and other countries. Third-party brands and names are for identification purposes only and are the property of their respective owners. Additional information, including relevant terms and conditions, posted at www.skyworksin.com, are incorporated by reference.