

DATA SHEET

# ISO13316: DC to 6 GHz Hermetic GaAs IC SPST Non-Reflective Switch

## Features

- Wideband frequency range: DC to 6 GHz
- Isolation: 50 dB @ 2 GHz
- Low Loss: 0.8 dB @ 6 GHz
- RF1 reflective / RF2 non-reflective
- High reliability Class B and S screening available

## Description

The ISO13316 is a GaAs pHEMT non-reflective, high-performance, low-loss switch.

The ISO13316 uses hermetic surface-mount technology (SMT) for defense and satellite applications.

The device can be supplied and tested to the screening requirements of MIL-PRF-38535 Class B and S, in addition to the required QCI.

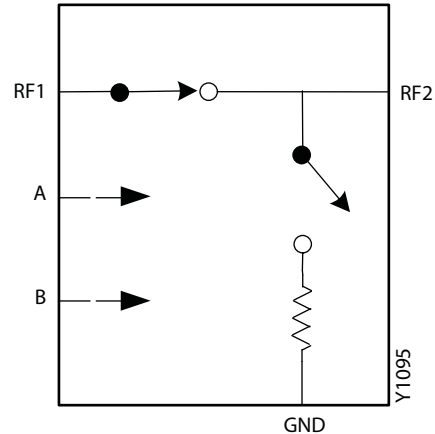


Figure 1. ISO13316 Block Diagram

A functional block diagram of the ISO13316 is shown in Figure 1. The ISO13316 device package and pinout are shown in Figure 2. Pin assignments and signal descriptions are shown in Table 1.

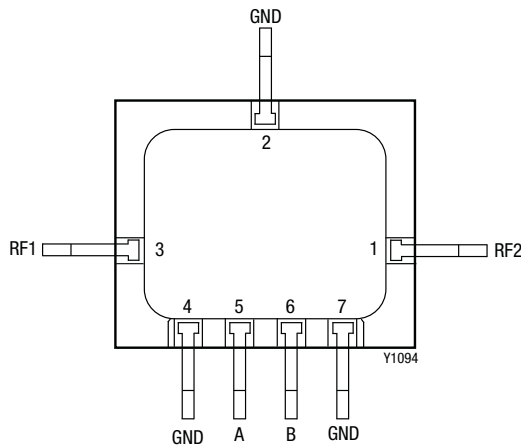


Figure 2. ISO13316 Pinout (Top View)

Table 1. ISO13316 Pin Descriptions

Pin	Name	Description
1	RF2	RF port 2
2	GND	Ground
3	RF1	RF port 1
4	GND	Ground
5	A	Control voltage A
6	B	Control voltage B
7	GND	Ground

### Electrical and Mechanical Specifications

The absolute maximum ratings of the ISO13316 are provided in Table 2. Electrical specifications are provided in Table 3. The truth table is shown in Table 4.

Typical performance characteristics of the ISO13316 are illustrated in Figures 3 through 8.

**Table 2. ISO13316 Absolute Maximum Ratings (Note 1)**

Parameter	Minimum	Maximum	Units
Control voltages (A and B)	-7.5	+1.0	V
RF input power		+30	dBm
Storage temperature	-65	+150	°C
Operating case temperature	-55	+125	°C
Junction temperature		+150	°C
Operating frequency	0.03	6.00	GHz

**Note 1:** Exposure to maximum rating conditions for extended periods may reduce device reliability. There is no damage to device with only one parameter set at the limit and all other parameters set at or below their nominal value. Exceeding any of the limits listed here may result in permanent damage to the device.

**CAUTION:** Although this device is designed to be as robust as possible, electrostatic discharge (ESD) can damage this device. This device must be protected at all times from ESD. Static charges may easily produce potentials of several kilovolts on the human body or equipment, which can discharge without detection. Industry-standard ESD precautions should be used at all times.

**Table 3. ISO13316 Electrical Specifications (Note 1) (1 of 2)**  
 (VCTL = 0 V/-5 V, TA = +25 °C, PINPUT = 0 dBm, ZO = 50 Ω, Unless Otherwise Noted)

Parameter	Test Condition	Frequency	Min	Typical	Max	Units
Insertion loss	DC to 2.0 GHz			0.50	0.80	dB
	2.0 to 3.0 GHz			0.60	0.90	dB
	3.0 to 4.0 GHz			0.75	1.05	dB
	4.0 to 6.0 GHz			0.78	1.10	dB
RF1/RF2 return loss (ON state)	DC to 2.0 GHz			24		dB
	2.0 to 3.0 GHz			18		dB
	3.0 to 4.0 GHz			14		dB
	4.0 to 6.0 GHz			14		dB
RF2 return loss (OFF state)	DC to 2.0 GHz			24		dB
	2.0 to 3.0 GHz			18		dB
	3.0 to 4.0 GHz			14		dB
	4.0 to 6.0 GHz			14		dB
Isolation	DC to 2.0 GHz		50	57		dB
	2.0 to 3.0 GHz		45	51		dB
	3.0 to 4.0 GHz		38	43		dB
	4.0 to 6.0 GHz		27	30		dB

**Table 3. ISO13316 Electrical Specifications (Note 1) (2 of 2)**  
**(VCTL = 0 V/-5 V, TA = +25 °C, PINPUT = 0 dBm, ZO = 50 Ω, Unless Otherwise Noted)**


Parameter	Test Condition	Frequency	Min	Typical	Max	Units
Switching characteristics	10% RF envelope to 90% RF envelope			5		ns
	90% RF envelope to 10% RF envelope					
	50% VCTL to 90% RF envelope			15		ns
	50% VCTL to 10% RF envelope			40		mV
	Video feed-through					
Input power for 1 dB compression	CW	0.5 GHz to 4.5 GHz		+25		dBm
Input power for 0.1 dB compression	CW	0.5 GHz to 4.5 GHz		+24		dBm
Intermodulation intercept point (IP3)	Two tone input power = +13 dBm per tone, 1 MHz spacing	0.5 GHz to 3.5 GHz		+46		dBm
Control voltages	VCTL Low		-0.2		0	V
	VCTL High		-3		-5	V
Control currents	VCTL Low			5	20	μA
	VCTL High			100		μA

**Note 1:** Performance is guaranteed only under the conditions listed in this table.


**Table 4. Truth Table**

Control Input		Signal Path State
A	B	RF1 to RF2
High	Low	ON
Low	High	OFF


**Typical Performance Characteristics**  
 (PIN = 0 dBm, ZO = 50 Ω, Unless Otherwise Noted)

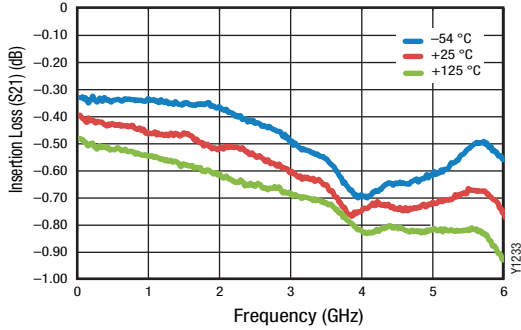


**Figure 3. Typical Insertion Loss (S21)**

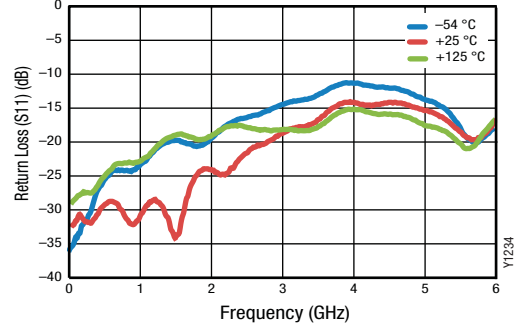


**Figure 4. Typical J1 Return Loss (Insertion Loss State - S11)**

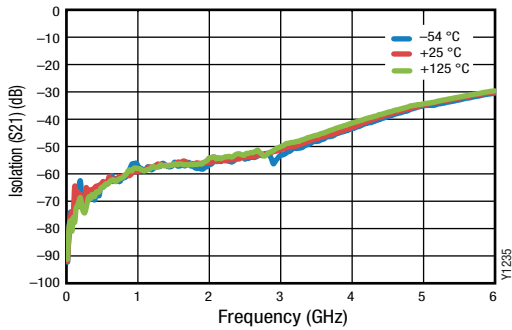


**Figure 5. Typical Isolation (S21)**

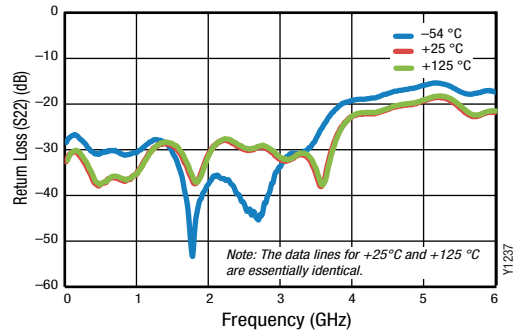

**Figure 6. Typical J2 Return Loss (Isolation State - S22)**

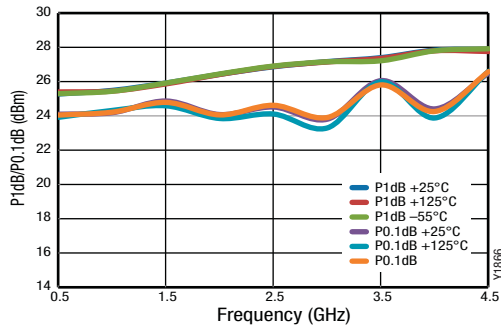

**Figure 7. P1dB (0.1dB) v Frequency v Temperature**

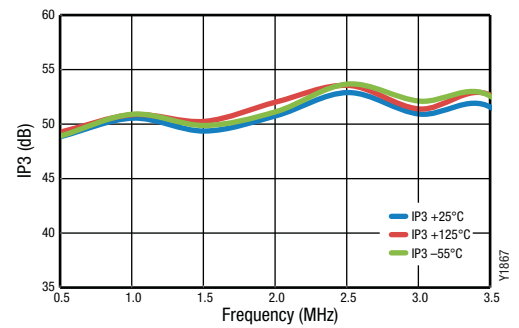

**Figure 8. IP3 v Frequency (0.5 to 3.5 GHz) v Temperature**

### Evaluation Board Description

The ISO13316 Evaluation Board is used to test the performance of the ISO13316 switch. A schematic of the Evaluation Board is shown in Figure 7. An assembly drawing for the Evaluation Board is shown in Figure 8.

### Package Dimensions

Package dimensions for the ISO13316 are shown in Figure 9.

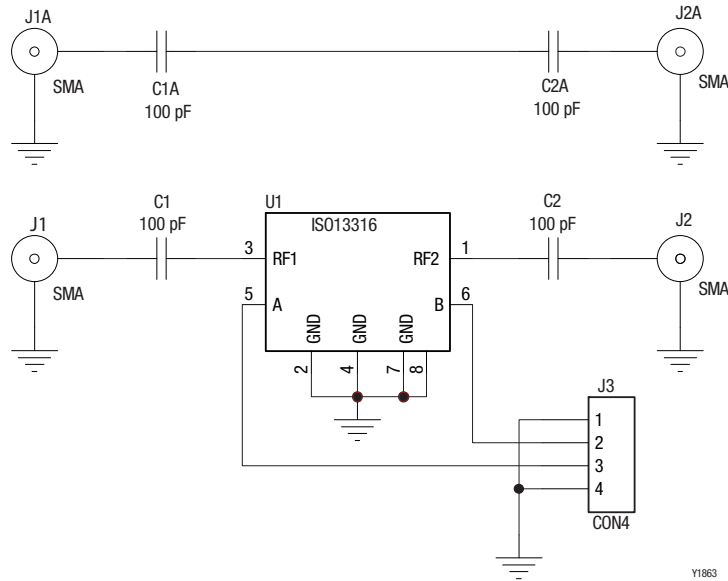


Figure 7. ISO13316 Evaluation Board


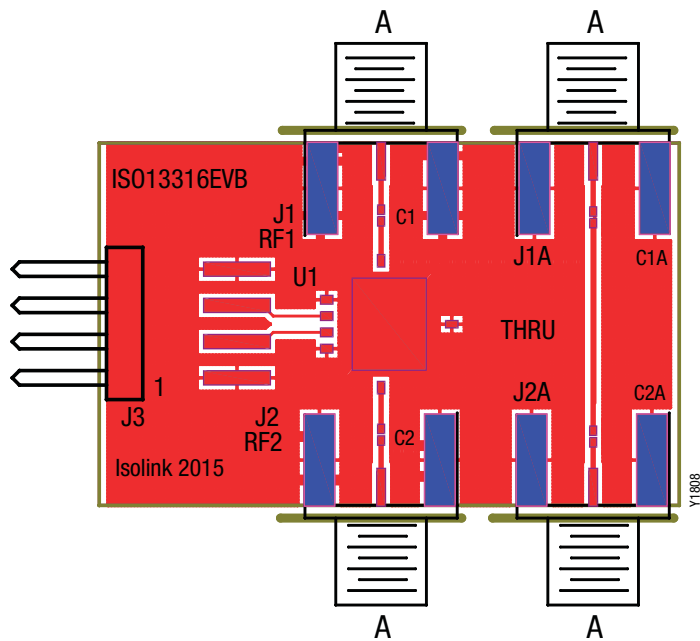


Figure 8. Evaluation Board Assembly Diagram

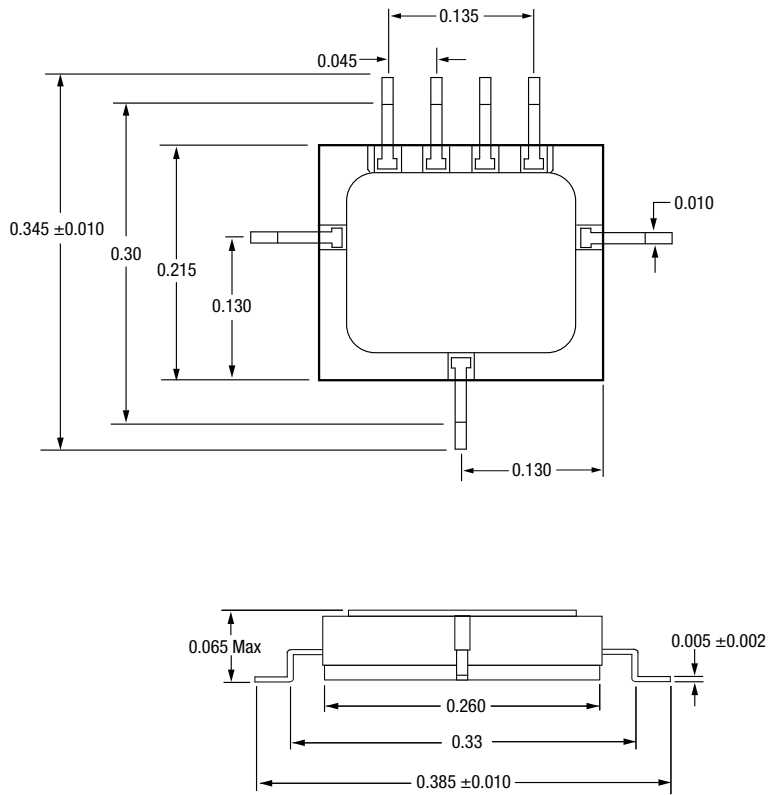

Y1096

**Figure 9. ISO13316 Package Dimensions**

**Ordering Information**

Model Name	Manufacturing Part Number
ISO13316: DC to 6 GHz Low Loss SPST	ISO13316

Copyright © 2015, 2017 Isolink, Inc. All Rights Reserved.

Information in this document is provided in connection with Isolink, Inc. ("Isolink"), a wholly-owned subsidiary of Skyworks Solutions, Inc. These materials, including the information contained herein, are provided by Isolink as a service to its customers and may be used for informational purposes only by the customer. Isolink assumes no responsibility for errors or omissions in these materials or the information contained herein. Isolink may change its documentation, products, services, specifications or product descriptions at any time, without notice. Isolink makes no commitment to update the materials or information and shall have no responsibility whatsoever for conflicts, incompatibilities, or other difficulties arising from any future changes.

No license, whether express, implied, by estoppel or otherwise, is granted to any intellectual property rights by this document. Isolink assumes no liability for any materials, products or information provided hereunder, including the sale, distribution, reproduction or use of Isolink products, information or materials, except as may be provided in Isolink Terms and Conditions of Sale.

THE MATERIALS, PRODUCTS AND INFORMATION ARE PROVIDED "AS IS" WITHOUT WARRANTY OF ANY KIND, WHETHER EXPRESS, IMPLIED, STATUTORY, OR OTHERWISE, INCLUDING FITNESS FOR A PARTICULAR PURPOSE OR USE, MERCHANTABILITY, PERFORMANCE, QUALITY OR NON-INFRINGEMENT OF ANY INTELLECTUAL PROPERTY RIGHT; ALL SUCH WARRANTIES ARE HEREBY EXPRESSLY DISCLAIMED. ISOLINK DOES NOT WARRANT THE ACCURACY OR COMPLETENESS OF THE INFORMATION, TEXT, GRAPHICS OR OTHER ITEMS CONTAINED WITHIN THESE MATERIALS. ISOLINK SHALL NOT BE LIABLE FOR ANY DAMAGES, INCLUDING BUT NOT LIMITED TO ANY SPECIAL, INDIRECT, INCIDENTAL, STATUTORY, OR CONSEQUENTIAL DAMAGES, INCLUDING WITHOUT LIMITATION, LOST REVENUES OR LOST PROFITS THAT MAY RESULT FROM THE USE OF THE MATERIALS OR INFORMATION, WHETHER OR NOT THE RECIPIENT OF MATERIALS HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

Customers are responsible for their products and applications using Isolink products, which may deviate from published specifications as a result of design defects, errors, or operation of products outside of published parameters or design specifications. Customers should include design and operating safeguards to minimize these and other risks. Isolink assumes no liability for applications assistance, customer product design, or damage to any equipment resulting from the use of Isolink products outside of stated published specifications or parameters.

Isolink is a trademark of Isolink Inc. in the United States and other countries. Skyworks and the Skyworks symbol are trademarks or registered trademarks of Skyworks Solutions, Inc., in the United States and other countries. Third-party brands and names are for identification purposes only, and are the property of their respective owners.